

Manhole Rings & Cover Slabs

(Size, weights and accessories)



TRACEY
CONCRETE


Tracey manhole rings and heavy duty cover slabs are manufactured in accordance with BS.5911 PT200. They are available ex stock in a wide range of standard diameters and depths.

All units are made in modern factory controlled conditions and carry the British Standard Kitemark logo.

Table 1 Details of Tracey Manhole Rings

=: Single steps X: Double steps


Internal Diam A	Wall Size B	Overall Diam C	Rein- Forced	Cirm to Determine Length of Joint Strip	Type of Joint	Step Irons	Approx Weight Per Meter Depth	Depths Manufactured		
								D	E	F
900	70	1040	•	3050	Rebate	=	520 kgs	300	600	900
1050	80	1210	•	3550	Rebate	X	700 kgs	300	600	900
1200	100	1400	•	4050	Rebate	X	1050 kgs	300	600	900
1350	100	1550	•	4550	Rebate	X	1100 kgs	300	600	900
1500	110	1720	•	5030	T&G	X	1300kgs	500	750	1000
1800	125	2050	•	6050	T&G	X	1800 kgs	500	750	1000
2100	140	2380	•	7050	T&G	X	2400 kgs	500	750	1000
2400	150	2700	•	8050	T&G	X	2900 kgs	500	750	1000
2700	150	3000	•	9050	T&G	X	3300 kgs	500	750	1000

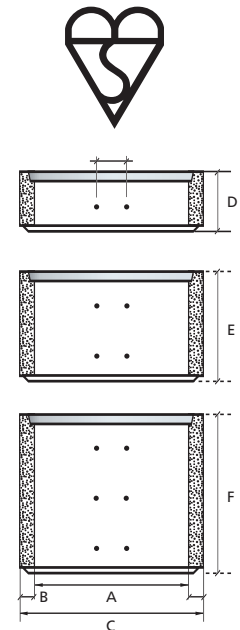

Holes are formed in Manhole Rings for steps supplied loose but can be fitted on request.

Table 2 Details of Cover Slabs to suit above


To Suit Internal Diam	Overall Diam	Effective Depth	Approx Weight with 675 sq ope	Size of access opening in standard stock	Other openings available on request	
900	1080	150	280Kgs	675 ø	-	-
1050	1250	150	350kgs	675 ø	-	-
1200	1420	150	480kgs	675 ø 675sq	750x600	-
1350	1610	170	680kgs	675 ø 675sq	750x600	-
1500	1760	170	850kgs	675 ø 675sq	750x600	1200x675
1800	2150	200	1600kgs	675 ø 675sq	750x600	1200x675
2100	2450	200	2200kgs	675 ø 675sq	750x600	1200x675
2400	2800	225	3100kgs	675 ø 675sq	750x600	1200x675
2700	3050	225	3850kgs	675 ø 675sq	750x600	1200x675

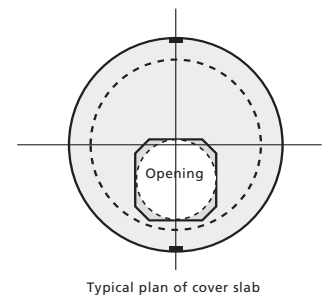

Special size openings can be formed in cover slabs on request, which may be required for pumping stations etc.


Ref: TC10/1

Date: 1/12/03




Ductile Iron Covers to BS EN 124


Heavy duty, double triangular, 600mm clear opening



Heavy Duty, Round and Hinged 600mm clear opening




Medium Duty, Round in Square Frame 600 clear opening




Steps to BS 1247

Galv. single step



Yellow Encapsulated **Double Step 125mm**



Yellow Encapsulated **Ladder Rung 125mm**



Yellow Encapsulated **Ladder Rung 210mm**

18 x 18mm Conesal Jointing Strip in 4.5m rolls supplied to fit between and seal each manhole ring.

T: 028 6632 6437 F: 028 6632 4908 From ROI (048) W: traceyconcrete.com E: headoffice@traceyconcrete.com

Whilst all information was correct at time of printing, the company reserves the right, without notice to the purchaser, to alter or change any dimension or illustration.

TRACEY CONCRETE Limited
Old Rossorry
Sligo Road
Enniskillen
Co.Fermanagh